



## Capacitive Sensors Series 70 - NPN Series 80 - PNP



Housing M 30 x 1.5



- Housing material: Brass
- Sensing distance 0,5...25 mm adjustable
- With flange connector M 12 x 1

Certificate:



QuattroE<sub>IC</sub>Protect™

Technical data	Flush mountable
Operating distance $S_n$	10 mm
Operating distance min. / max. adjustable	0.5...25 mm
Electrical version	4-pin DC
Output function	Antivalent (NO + NC)
<b>Type NPN</b>	<b>KAS-70-A14-A-Y5</b>
<b>Art.-No.</b>	<b>705 400</b>
Connection diagram No.	3
<b>Type PNP</b>	<b>KAS-80-A14-A-Y5</b>
<b>Art.-No.</b>	<b>805 400</b>
Connection diagram No.	6
Operating voltage ( $U_B$ )	10...35 V DC
Output current max. ( $I_e$ )	2 x 250 mA
Voltage drop max. ( $U_d$ )	≤ 2.0 V
Permitted residual ripple max.	10 %
No-load current ( $I_o$ )	Typ. 15 mA
Frequency of operating cycles max.	200 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67
Norm	EN 60947-5-2
Connection	Flange connector M 12 x 1
Housing material	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
Media optimized	Yes

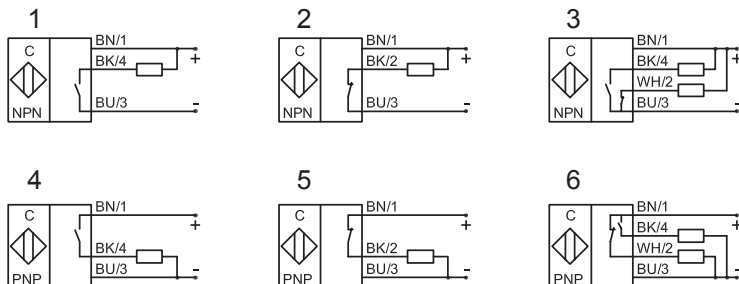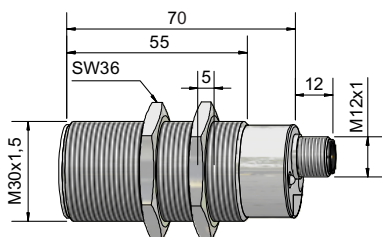

Made in Germany

All specifications are subject to change without notice. (05/2010)